



**Note: Screen is not connected to Accelerometer case via the locking key when the cable is connected.**

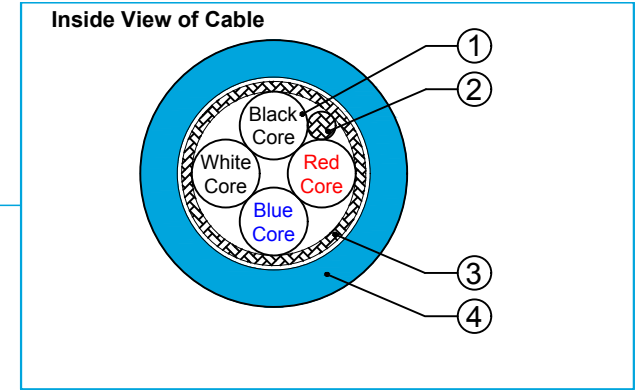

**Environment Specification of Cable Assembly**  
Maximum operating temperature of 150°C with high levels of resistance to chemical attack.

2 Pin MS Connector inside Protective Rubber Boot.

Connector sealed to IP66 only when connected to the accelerometer.

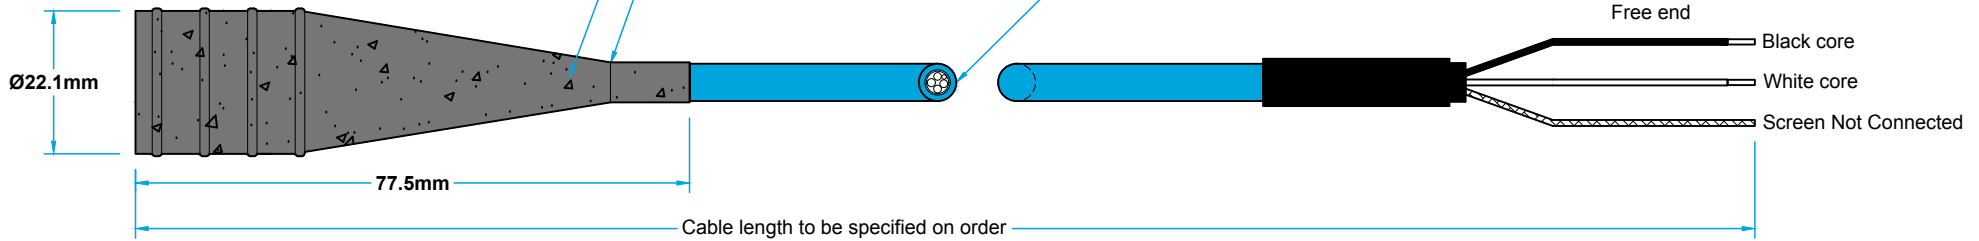

Materials of Cable: C01-001 PUR cable				
Pos	Description	Dimension	Overall Diameter	Remarks
1.	Tin plated copper conductor insulation of HFl 147	22 AWG 0,20	0,76 1,16	19 x 0,16 (0,34mm <sup>2</sup> )
2.	Screen wire of tin plated copper	26 AWG	0,48	19 x 0,10 (0,16mm <sup>2</sup> )
3.	Wrapped aluminium polyester foil screen		3,0	
4.	Jacket of TPU 90 M, blue pressure-extruded round	1,15	5,3 ± 0,2	

Technical Data of Cable		
Technical Data	Values at 20°C	Unit
Conductor resistance	Max: 53,1	Ω / km
Insulation resistance	>1500	MΩ x km
Test voltage	3	KV DC
Voltage rating	600	V AC
Capacitance	Core- opposite core: 139	nF / km
	Core- adjacent core: 145	
	Core-screen: 240	
Impedance	Core- opposite core: 48	Ω
	Core- adjacent core: 44	
	Core-screen: 20	
Radiation tolerance	4 x 10 <sup>-5</sup>	Gy
Weight	38	g / m
Temperature rating	-40 / +90	°C
Core current rating	Max: 6	Amps at 40°C ambient air temp.



www.ie-central.com

HS-AC320 Issue A

