


# HS-AM Magnets - Flat Face

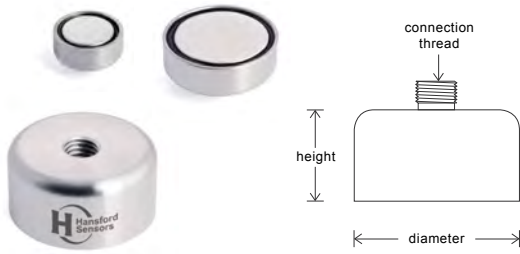

We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Flat Face Pot Magnets provide a secure, semi-permanent point of connection to a flat surface and all have a constant operating temperature range up to 248°F.

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM027	0.8in	1/4"-28 UNF Male	26lbs	0.3in	
HS-AM028	0.8in	M6 Male	26lbs	0.3in	
HS-AM029	0.8in	M8 Male	26lbs	0.3in	
HS-AM030	0.8in	10-32 UNF Male	26lbs	0.3in	
HS-AM009	1in	1/4"-28 UNF Male	30lbs	0.3in	
HS-AM006	1in	M6 Male	30lbs	0.3in	
HS-AM007	1in	M8 Male	30lbs	0.3in	
HS-AM024	1in	10-32 UNF Male	30lbs	0.3in	
HS-AM008	1in	Q-Fit Male	30lbs	0.6in	
HS-AM014	1in	1/4"-28 UNF Female	30lbs	0.6in	
HS-AM015	1in	M5 Female	30lbs	0.6in	



[www.ie-central.com](http://www.ie-central.com)

We reserve the right to alter the specification of this product without prior notice  
TS1446U



# HS-AM Magnets - Flat Face

Part No.      Diameter      Thread      Pull Strength      Height

HS-AM016      1in      M6 Female      30lbs      0.6in



HS-AM017      1in      M8 Female      30lbs      0.6in



HS-AM031      1.2in      1/4"-28 UNF Male      55lbs      0.4in



HS-AM032      1.2in      M6 Male      55lbs      0.4in



HS-AM033      1.2in      M8 Male      55lbs      0.4in



HS-AM034      1.2in      10-32 UNF Male      55lbs      0.4in



HS-AM045      1.2in      1/4"-28 UNF Female      55lbs      0.6in



HS-AM046      1.2in      M6 Female      55lbs      0.6in



HS-AM047      1.2in      M8 Female      55lbs      0.6in



HS-AM019      1.6in      1/4"-28 UNF Male      110lbs      0.4in



[www.ie-central.com](http://www.ie-central.com)

We reserve the right to alter the specification of this product without prior notice  
TS1446U

