


HS-AM Magnets - Pole Piece

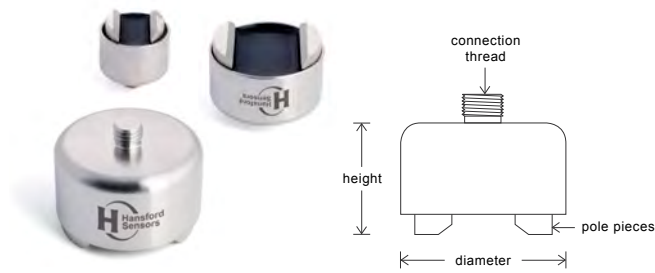

We manufacture a range of accessories for use with our comprehensive series of industrial accelerometers to achieve a secure surface fit.

Pole Piece Pot Magnets provide a secure, semi-permanent point of connection to a curved surface and all have a constant operating temperature range up to 248°F.

Part No.	Diameter	Thread	Pull Strength	Height
HS-AM020	0.8in	1/4"-28 UNF Male	19lbs	0.7in
HS-AM001	1in	1/4"-28 UNF Male	40lbs	0.7in
HS-AM002	1in	M6 Male	40lbs	0.7in
HS-AM003	1in	M8 Male	40lbs	0.7in
HS-AM004	1in	10-32 UNF Male	40lbs	0.7in
HS-AM026	1in	1/2" UNC Q-Fit Male	40lbs	0.8in
HS-AM005	1in	Q-Fit Male	40lbs	0.9in
HS-AM010	1in	M5 Female	40lbs	0.9in
HS-AM011	1in	M6 Female	40lbs	0.9in
HS-AM012	1in	1/4"-28 UNF Female	40lbs	0.9in
HS-AM013	1in	M8 Female	40lbs	0.9in














www.ie-central.com

We reserve the right to alter the specification of this product without prior notice
TS1447U



HS-AM Magnets - Pole Piece

Part No.	Diameter	Thread	Pull Strength	Height	
HS-AM018	1.3in	1/4"-28 UNF Male	44lbs	0.8in	
HS-AM036	1.3in	M6 Male	44lbs	0.8in	
HS-AM037	1.3in	M8 Male	44lbs	0.8in	
HS-AM041	1.3in	M6 Female	44lbs	1in	
HS-AM040	1.3in	M8 Female	44lbs	1in	
HS-AM035	1.3in	1/4"-28 UNF Female	44lbs	1in	
HS-AM039	1.4in	1/4"-28 UNF Male	77lbs	1.3in	
HS-AM042	1.4in	M5 Female	77lbs	1.3in	
HS-AM043	1.4in	M6 Female	77lbs	1.3in	
HS-AM038	1.4in	1/4"-28 UNF Female	77lbs	1.3in	
HS-AM044	1.4in	M8 Female	77lbs	1.3in	



www.ie-central.com

We reserve the right to alter the specification of this product without prior notice
TS1447U

