

Hazardous-Area Approved DP1009



Intrinsically Safe FFv™ Proximity Probe, 5 mm Probe Tip Diameter, with 1/4-28, 3/8-24, M8x1, or M10x1 Case Thread



Product Features


Measure shaft vibration and displacement on machinery with fluid film bearings

Durable PPS over-molded probe tips withstand harsh conditions when monitoring critical machinery such as turbines and compressors

- ▶ 5 mm probe tip diameter with 1/4-28, 3/8-24, M8x1 or M10x1 threaded body
- ▶ Probe tip and body sealed to prevent leaking through cable
- ▶ Complete hardware system is compatible with all standard condition monitoring software


DP100901

Standard Mount

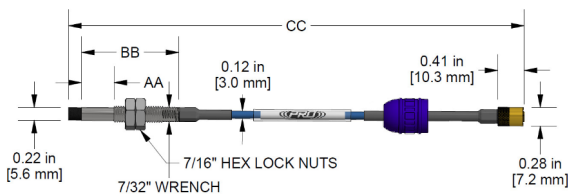


DP100903

Standard Mount

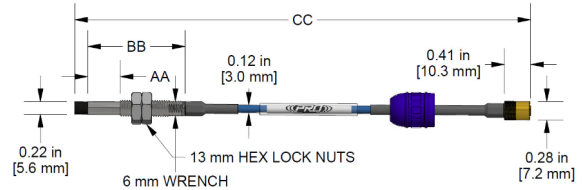


DP100906

Reverse Mount

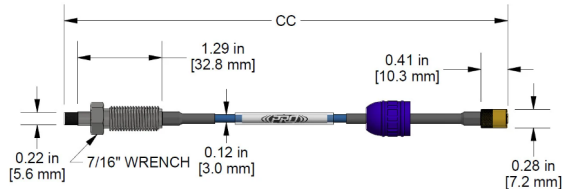

DP100907

Reverse Mount

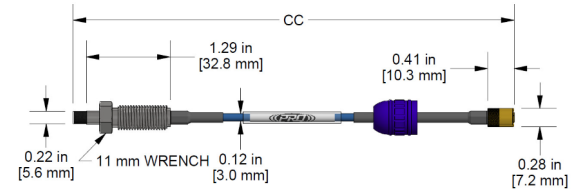

Lengths AA, BB, and CC are configurable

Specifications

Temperature Range	-49 to 340 deg;F (-45 to 171 °C)
Sensitivity	-200 mV/mil (-7.87 V/mm) (1 mil = 0.001 in.)
Material	FEP Cable Jacket with 316L Stainless Steel Probe Body
Case Thread	1/4-28 or M8x1 (Standard Mount), 3/8-24 or M10x1 (Reverse Mount)
Wrench Flats	7/32 in. or 7 mm (Standard Mount), 7/16 in. or 11 mm (Reverse Mount)
Rating	IP68
Connector	SecureLock
Connector Pull Strength	Up to 30 lbs.
Bending Radius	1.16 in. (2.95 cm)

Built to Order

Regulatory Approvals

US & Canada:

Class I Division 1 Groups A, B, C, D
Class II Division 1 Groups E, F, G
Class III
Class I Zone 0 AEx ia IIC
Class I Division 2 Groups A, B, C, D
Class II Division 2 Groups E, F, G
Ex ia IIC Ga

ATEX:


SIRA 16ATEX2084X
Ex ia IIC

International (IECEx):

IECEx CSA 16.0017X
Ex ia IIC

Temperature Codes:

T4 = -45°C to 100°C
T5 = -35°C to 85°C



FOR REFERENCE ONLY, PLEASE REFER TO CONTROL DRAWING

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900