


# PXE110

Proximity Probe Driver Enclosure, Fiberglass, NEMA 4X (IP66) Rated, Channel Options: 1 to 2



## Product Features

- Accommodates up to 2 Proximity Probe Drivers
- Enclosure protects components from dirt, dust, oil and water
- ▶ Optional DC Power Supply, switchable 110/220 VAC to 100/240 VAC to 24VDC power supply
- ▶ Proximity Probe Drivers Sold Separately. All Newly Purchased Drivers Come Fully Installed and Wired

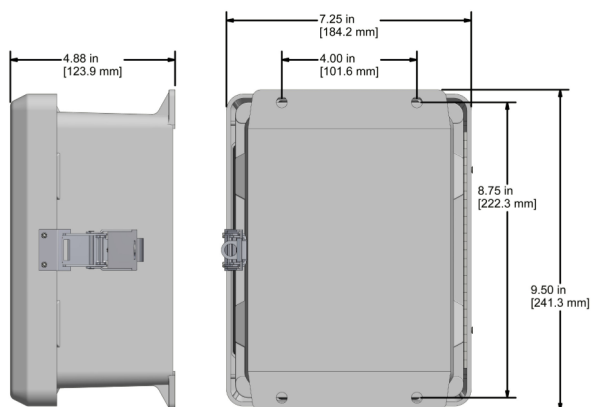

## Specifications

Temperature Range	15° to 140°F (-10° to 60°C)
Enclosure Material	Fiberglass
Power	100-240 VAC
Inputs	Screw Terminal Block Directly Into Proximity Probe
Outputs	BNC Jack for Dynamic Signal and Terminal Blocks
Sensor Input Options	1 to 2 Channels
Rating	NEMA 4X (IP66)
Door Closure	Snap Latches
Dimensions	7.25 x 9.50 x 4.88 in (184.2 x 241.3 x 123.9 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

## Ordering Information

PXE    -  -

<b>Enclosure Type</b> 110 = Fiberglass Enclosure 210 = Stainless Steel Enclosure	<b>Add Ons</b> Blank = No Add Ons Included P = Power Supply	<b>Channels</b> 01 = 1 Channel 02 = 2 Channels	<b>Enclosure Entry</b> A = User Defined* B = 3/4 in. Conduit Fitting** and 1/2 in. Conduit Fitting for Power† C = Nylon Cord Grips and 1/2 in. Conduit for Power	<b>Output Options</b> A = User Defined* B = 3/4 in. Conduit Fitting**
--	---	--	---	---

\*No punch outs are provided in the enclosure for cable entry. User may install any fitting required  
 \*\*For use with conduit.  
 †1/2 in. conduit fitting included on power supply options only

Lifetime Warranty on Materials & Workmanship  
 www.ctconline.com | sales@ctconline.com | 585-924-5900