

PXE250P Standard Size



Proximity Probe Driver Enclosure with Power Supply Included, Stainless Steel, NEMA 4X (IP66) Rated, Channel Options 1 to 6




Product Features

Accommodates up to 6 Proximity Probe Drivers

Enclosure protects components from dirt, dust, oil and water


- ▶ Power Supply included: switchable 110/220 VAC to 100/240 VAC to 24VDC
- ▶ Proximity Probe Drivers Sold Separately. All Newly Purchased Drivers Come Fully Installed and Wired

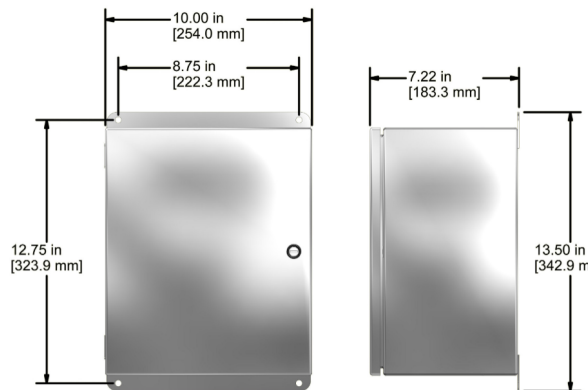

Specifications

Temperature Range	15 to 140 °F (-10 to 60 °C)
Enclosure Material	Stainless Steel
Power	100 - 240 VAC
Inputs	Screw Terminal Block Directly Into Proximity Probe
Outputs	BNC Jack for Dynamic Signal and Terminal Blocks
Sensor Input Options	1 - 6 Channels
Rating	NEMA 4X (IP66)
Door Closure	Keyed Slot
Dimensions	10.00 x 13.50 x 7.24 in (254 x 343 x 184 mm)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

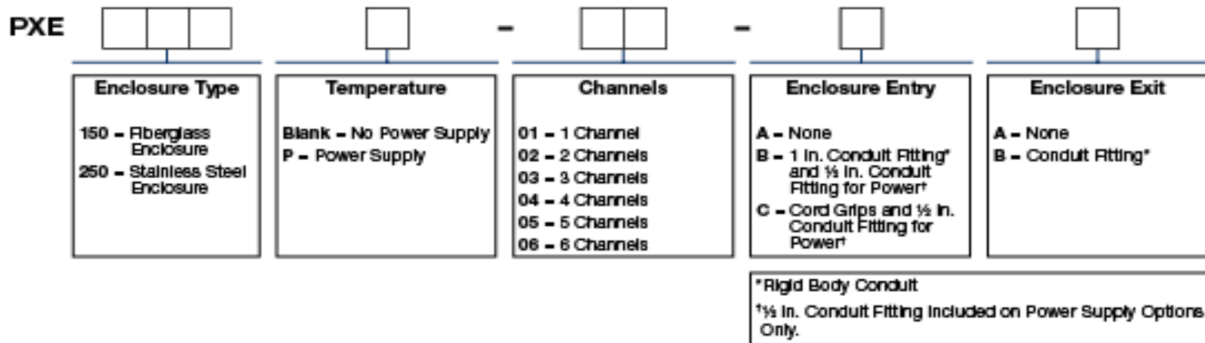

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900